


## Extra-long disposable gloves for superior product and worker protection

- **Extended chemical protection:** MICROFLEX™ 93-243 gloves feature an extra-long cuff to shield more of your arm and provide excellent chemical splash protection — ideal for laboratory and pharmaceutical manufacturing, as well as food processing workers
- **Reduced allergy risk:** Manufactured without accelerators, helping to protect users from Type IV skin allergies
- **Ultra-long cuff design:** MICROFLEX™ 93-243 gloves feature an elbow-length cuff designed to prevent roll-down and minimize the risk of cross-contamination
- **Secure grip:** The textured palm and fingers of these gloves results in a more confident, secure grip of instruments and glassware
- **Product protection:** To prevent contamination and protect product integrity, these gloves are packed in polybags

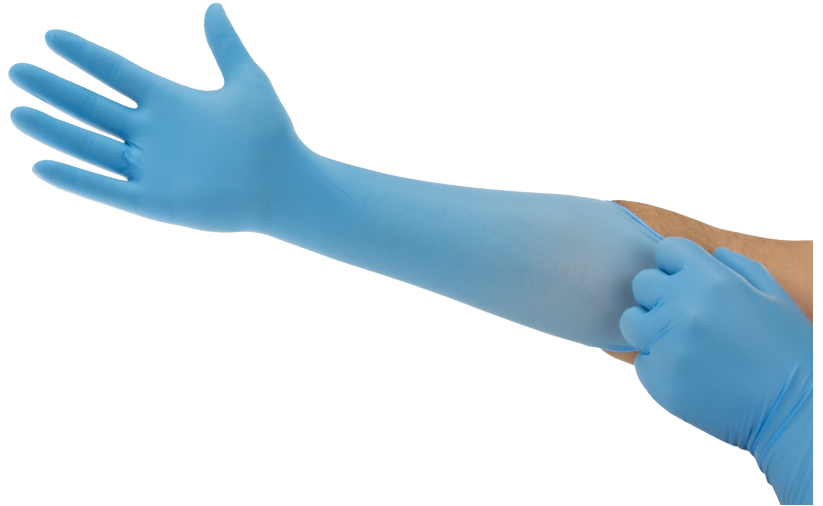

### Industries

- Food Processing
- Life Sciences

### Recommended For

- Enhanced tactile sensitivity and dexterity, especially for delicate procedures

# TECHNICAL DATA SHEET

Product Information	
Material	Nitrile
External Glove Surface	Fully Textured
Audit Standards	ISO 9001
Product Certification	Personal Protective Equipment Regulation (EU) 2016/425 Category III risks, CE 0493, EN 16523-1, EN ISO 374-1:2016 Type B KPT, EN ISO 374-5:2016 Virus, EN ISO 21420:2020, EU Food Contact Approved, ISO 9001, UKCA, EN 1149-5
Packaging Overview	100 gloves per polybag 10 polybags per case 1000 gloves per case
Storage Instructions	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country Of Origin	Malaysia
Product Segmentation	High Risk
Antistatic	Yes EN1149
Vulcanization Chemical Accelerators	<ul style="list-style-type: none"> <li>Made without accelerators</li> </ul> <p><i>Only a very small number of users may be sensitive to this ingredient(s) and hence may develop irritant and/or allergic contact reactions.</i></p>

## PHYSICAL PROPERTIES

	Typical Values		Testing Method
Length (mm/inches)	390 / 15.4		ASTM D3767,EN 420
Freedom from Holes (Inspection level I)	1.5 AQL		ASTM D5151,EN 455-1
Palm Thickness (mm/mils)	0.13/5.1		ASTM D3767,EN 420
Finger Thickness (mm/mils)	0.17/6.7		ASTM D3767,EN 420
	<b>BEFORE AGING</b>	<b>AFTER AGING</b>	
Elongation at Break (%)	≥ 500	≥ 400	ASTM D412
Force at break (N)	≥ 6	≥ 6	

## ORDERING INFORMATION

Size	XS (5.5 - 6)	S (6.5 - 7)	M (7.5 - 8)	L (8.5 - 9)	XL (9.5 - 10)	XXL (10.5 - 11)
Product Code	93243060	93243070	93243080	93243090	93243100	93243110

### Performance Standards and Regulatory Compliance



### For additional information visit us at [www.ansell.com](http://www.ansell.com), or call us at

#### Europe, Middle East & Africa Region

Ansell Healthcare Europe NV  
 T: +32 (0) 2 528 74 00  
 F: +32 (0) 2 528 74 01

#### Asia Pacific Region

MY: +603 8310 6688  
 apac.medical@ansell.com  
 CN: +86 21 38275000  
 infochina@ansell.com  
 JP: +813 5549 8151  
 info.medical.jp@ansell.com

#### North America Region

Ansell Healthcare Products LLC  
 T: +1 800 800 0444  
 F: +1 800 800 0445

#### Latin America & Caribbean Region

BR: +55 (11) 3356-3100  
 latam.medical@ansell.com  
 MX: +52 442 296 2050  
 latam.medical@ansell.com  
 CO: +57 1 288 3247  
 latam.medical@ansell.com

#### Australia

Ansell Limited  
 T: +61 1800 337 041  
 F: +61 1800 803 578

#### Russia

Ansell PYC  
 Ten. +7 495 258 13 16

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending;  
[www.ansell.com/patentmarking](http://www.ansell.com/patentmarking) © 2025 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of  
 merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of  
 an end user's selection of gloves for a specific application.

